
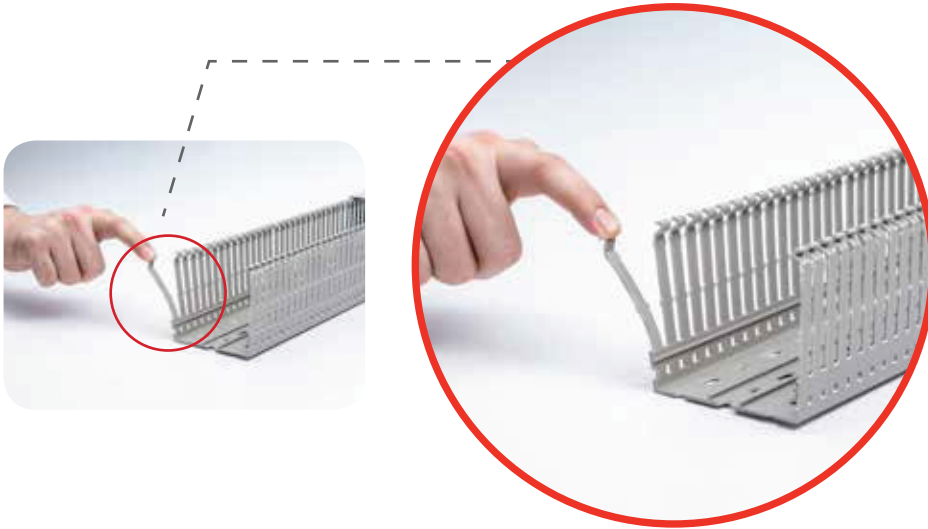


SLOTTED CABLE DUCTS

Code	External Dimensions	Colour	Packaging
PDK 2540	25x40	RAL 7030 Grey	50x2 m
PDK 2560	25x60	RAL 7030 Grey	35x2 m
PDK 4040	40x40	RAL 7030 Grey	35x2 m
PDK 4060	40x60	RAL 7030 Grey	28x2 m
PDK 4080	40x80	RAL 7030 Grey	20x2 m
PDK 6040	60x40	RAL 7030 Grey	25x2 m
PDK 6060	60x60	RAL 7030 Grey	16x2 m
PDK 6080	60x80	RAL 7030 Grey	16x2 m
PDK 8060	80x60	RAL 7030 Grey	14x2 m
PDK 8080	80x80	RAL 7030 Grey	12x2 m
PDK 10060	100x60	RAL 7030 Grey	10x2 m
PDK 10080	100x80	RAL 7030 Grey	10x2 m
PDK 12060	120x60	RAL 7030 Grey	10x2 m
PDK 12080	120x80	RAL 7030 Grey	8x2 m


MAIN TECHNICAL FEATURES:

- Made of: technopolymer on rigid PVC base, self-extinguishing (UL94) V0
- Narrow slots 4/6/4mm
- Perforated bottom according to the standard DIN 43659
- Standard bars length: 2m
- Reference Standards: EN 5085-2-3
- Packed in strong cardboard boxes suitable for transport and storage
- Standard colour RAL7030, other colours on request
-  RoHS



First Break Line

You can bend the duct ribs up to 90 degrees angle and easily break them without any hand tools.

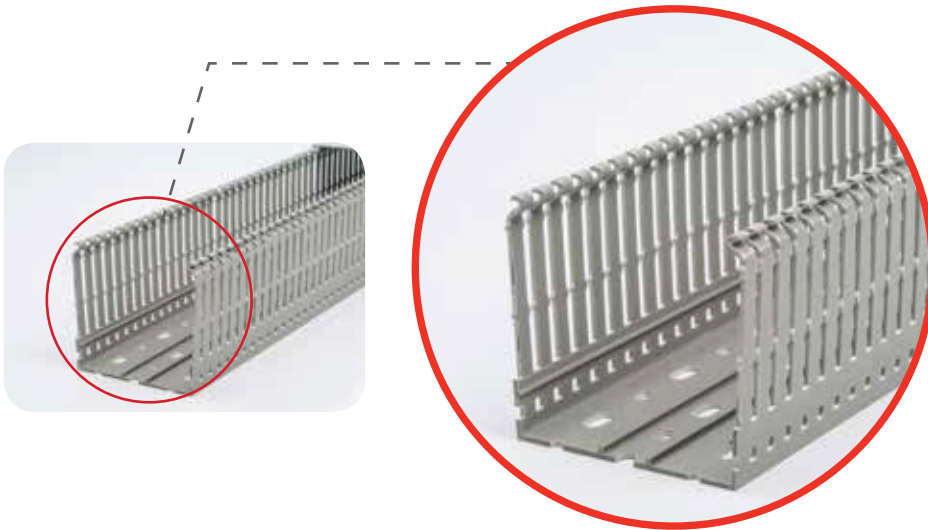



Bottom Rails

You can easily mount the accessories on the bottom rails on the duct.

PLASTiM PDK6060 RoHS CE E


Second Break Line

Second break line at the base of the slots permits to remove the whole trunking wall.

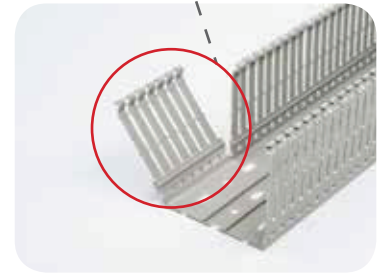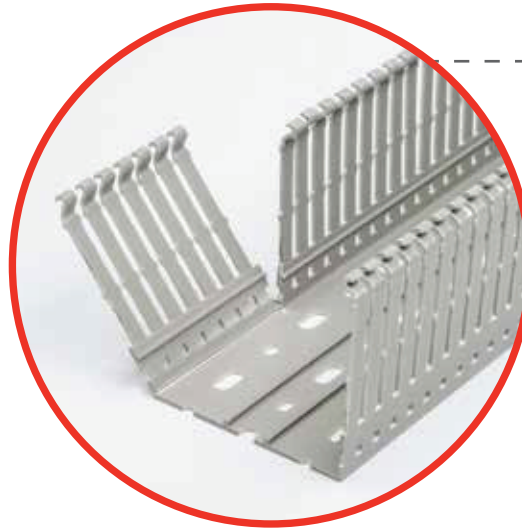

Special Cover Design

Really easy to install also thanks to the cover that doesn't fall off although the trunking is put vertically or turned upside down.

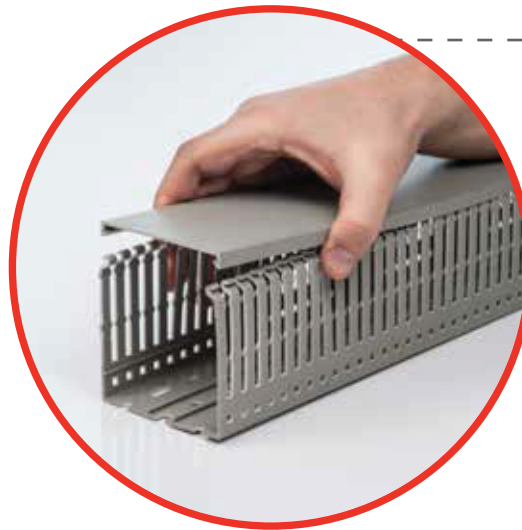

INS50085 2-3 MADE IN TURKEY